JOY TUTUS

A / EN

USAGE GUIDELINES

SKU: A1317-05382-BK

IMPORTANT

Before installation, please make sure that all accessories are ready. (As shown in the picture below).

Estimated installation time:

25 minutes

NOTES

1) Make sure the vehicle is completely clean and dry in the area the part is to be installed.
2) Ensure the vehicle is properly protected in the area that the accessory is to be installed.
3) Any weight carried on the vehicle on vehicle will adversely affect its handling particularly in cornering or in a crosswind and the vehicle should therefore be driven with increased caution.
4) Loads must be evenly distributed and secured.

If you have any concern of installing or using this product Please feel f ree to contact us via service@ joytutus.com

CUSTOMER SUPPORT

Contact us by email:
service@joytutus.com

JOYTUTUS help center:

http://support.joytutus.com

PRODUCT INFORMATION



1 Short Crossbar-Rear x 1



2 Long Crossbar-Front x 1

3 Key x 1



4 L-shaped Handle Wrench x 1

5 Screw x 4

6 LR Long Bottom Cover x 1

7 RR Long Bottom Cover x 1

8 RF Short Bottom Cover x 1

9 LF Short Bottom Cover x 1

NOTE

The buckle can be lifted and pushed into the slot.
It can be threaded with self-provided ropes to secure items.

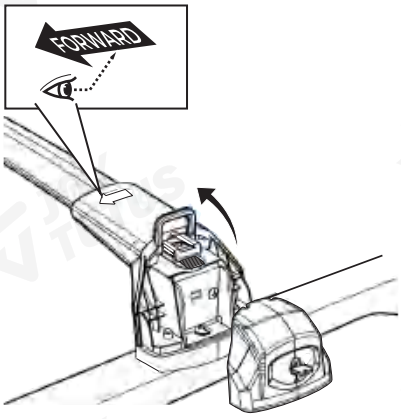

Usage Method 1

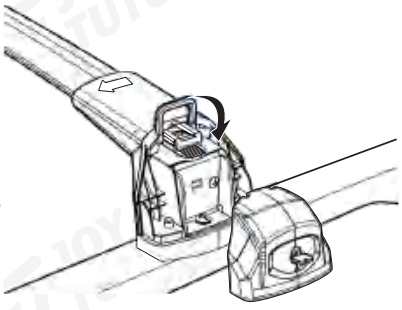

Usage Method 2

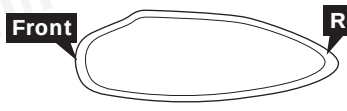

The round head of the crossbar faces to the front and the pointy head faces to the rear.

The sealing tape can be cut down the center so that the T-bolt can be slid into the crossbar.

INSTALLATION METHOD

STEP 1 Use the key to unlock the base lock.

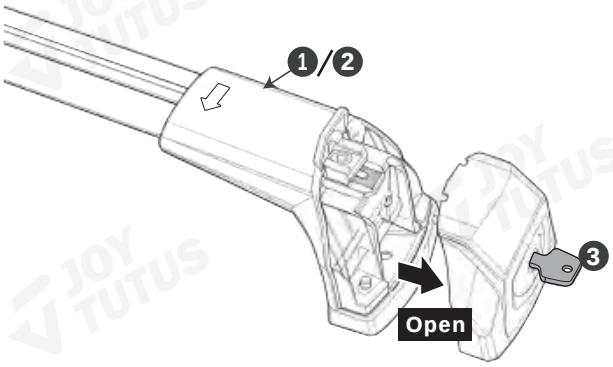

STEP 2 Use the Allen key to loosen the screw then the left and right,sides are adjustable.

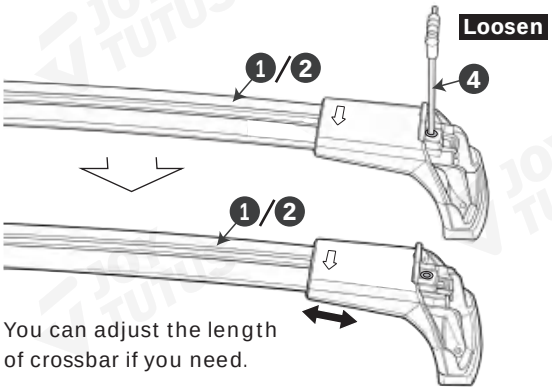

You can adjust the length of crossbar if you need.

STEP 3 a) Remove the 4 covers from the roof.
b) Replace the covers in kit as shown below into the right space on the roof,then place the bar on the cover,adjust the position of the base,and ensure that the holes are aligned.

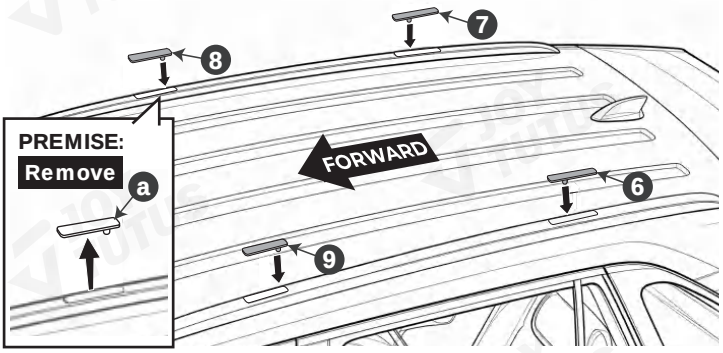

c) Secure the base to the roof with M8 bolt by the allen key.
d) Check the installation direction.

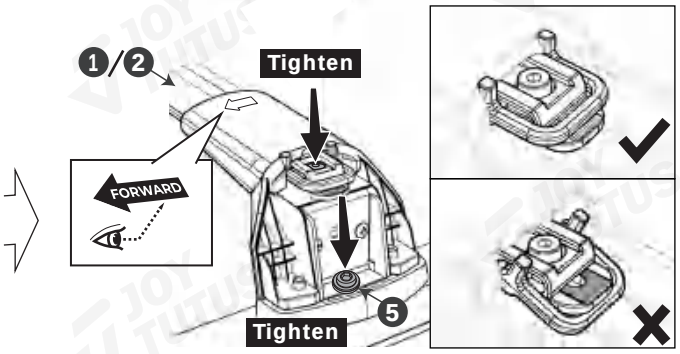

Note: Before tightening,push the front hook inward; it must not be caught underneath.

STEP 4 Put the cover back and lock it

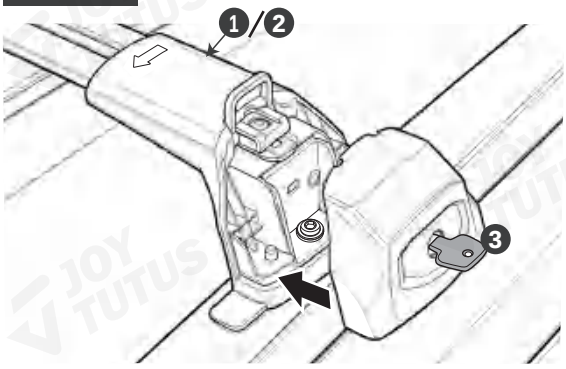

TIP After the installation is completed, all the accessories should be neatly organized and stored.

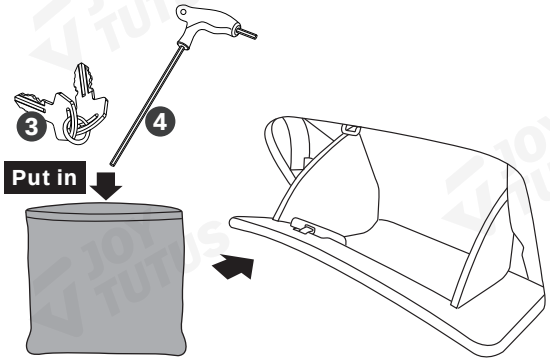

STEP 5 Check the installation direction and ensure all components are firmly secured.

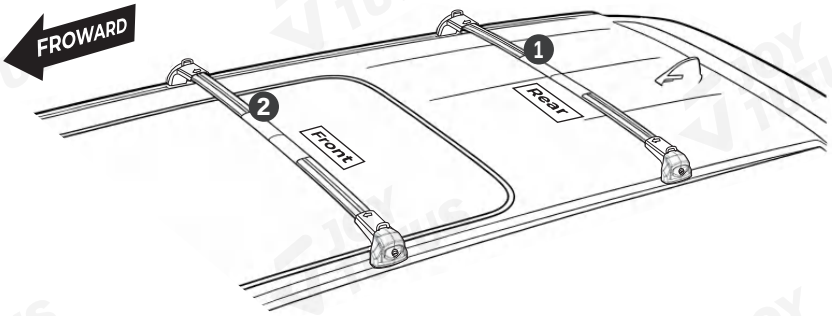



If you have any questions, please visit Joytutus website for quick response.
Web: www.joytutus.com