


IMPORTANT

For safety and to ensure a satisfactory installation, please read the installation steps below before you install this kit.

PRODUCT INFORMATION


- 1 Left Frame-left Side Panel x1
- 2 Left Frame-center-left Board x1
- 3 Left Frame-reinforcement Plate x2
- 4 Left Frame-center-middle Board x1
- 5 Left Frame-center-right Board x1
- 6 Left Frame-right Panel x1
- 7 Right Frame-left Panel x1
- 8 Right Frame-middle Plate x1
- 9 Right Frame-right Side Panel x1
- 10 M4*10 Hexagon Socket Head Screw x26
- 11 M6*20 Hexagon Socket Screw With Washer x4
- 12 M4*15 Hexagon Socket Screw With Washer x4
- 13 M4 Flange Nut x4
- 14 M6 Flange Nut x4
- 15 Hexagonal Wrench-a x1
- 16 Hexagonal Wrench-b x1
- 17 Wrench-a x1
- 18 Wrench-b x1

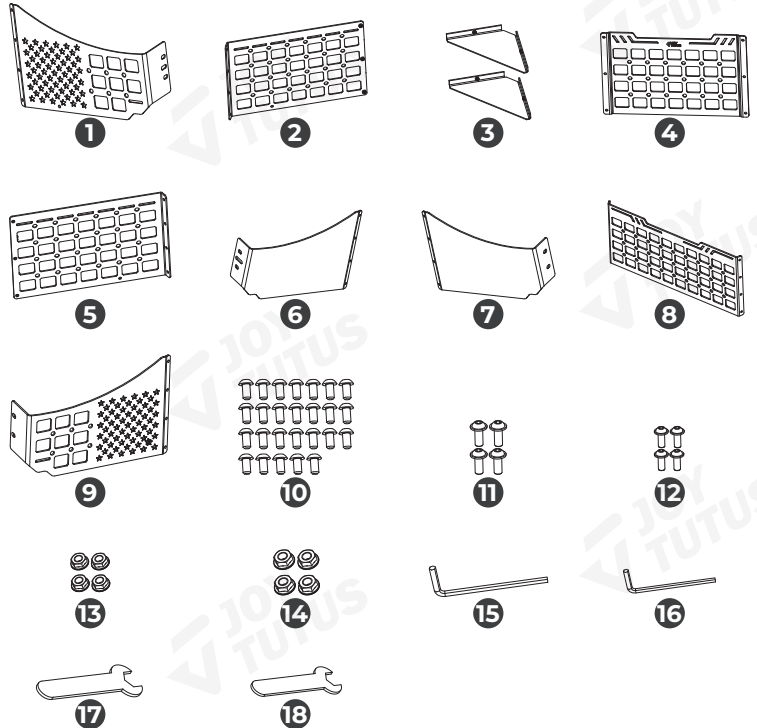


INSTALLATION METHOD

1. Installation instructions in the installation diagram [1] [2] [3] [4] [5] [6].


- 1.1** First use [10] to assemble [1] [2], then use [10] to connect the assembled [1] [2] to [3] and fix it. (**NOTE:** [1] surrounded by [2].)

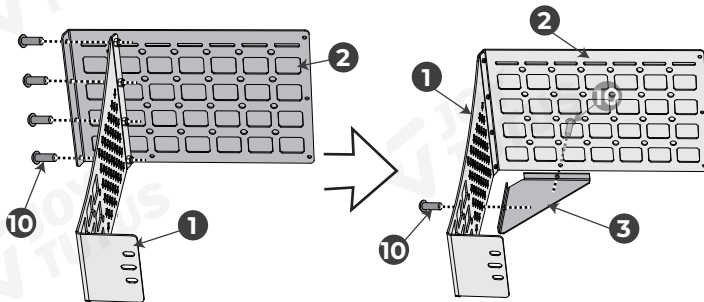

- 1.2** First use [10] to assemble [5] [6], then use [10] to connect the assembled [5] [6] to [3] and fix it. (**NOTE:** [6] surrounded by [5].)

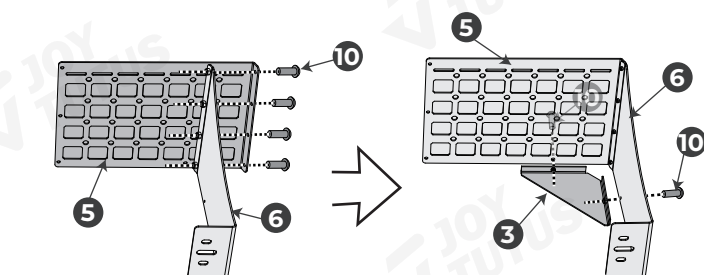

- 1.3** Use [10] to connect and fix [4] with assembled [2] and assembled [5].

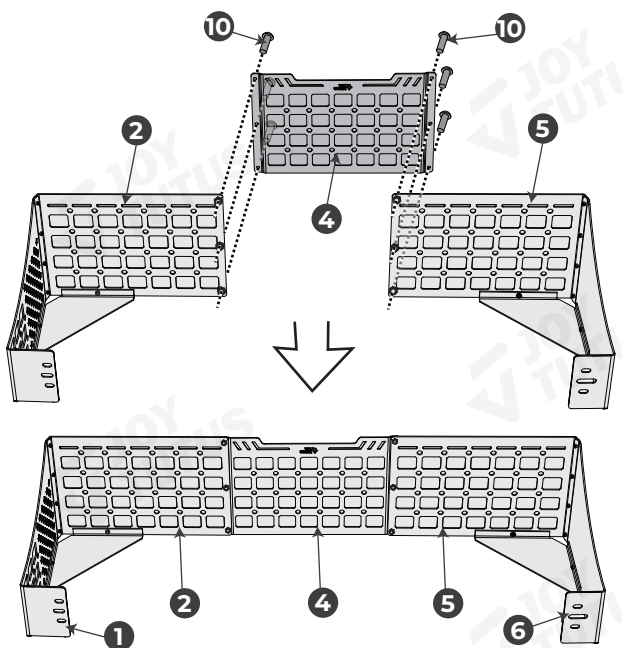


If you have any questions, please visit Joytutus website or email for quick response.


Web: www.joytutus.com

Email: Service@joytutus.com


2. Use [10] to assemble [7] [8] [9].
(NOTE: [7] [9] surrounded by [8].)

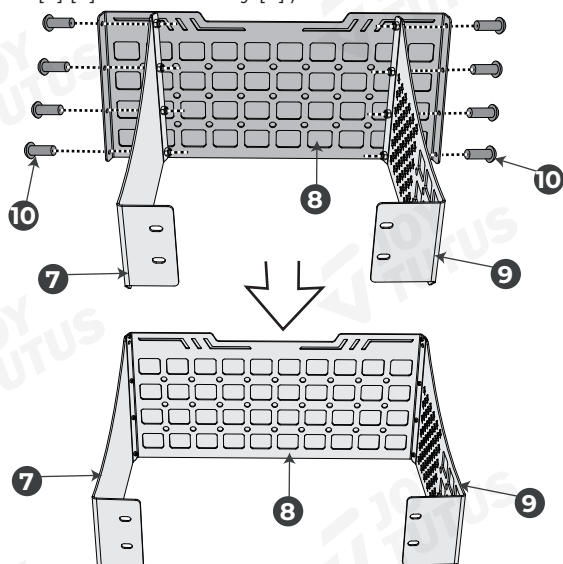


3. Lift up the rear seat cushion.

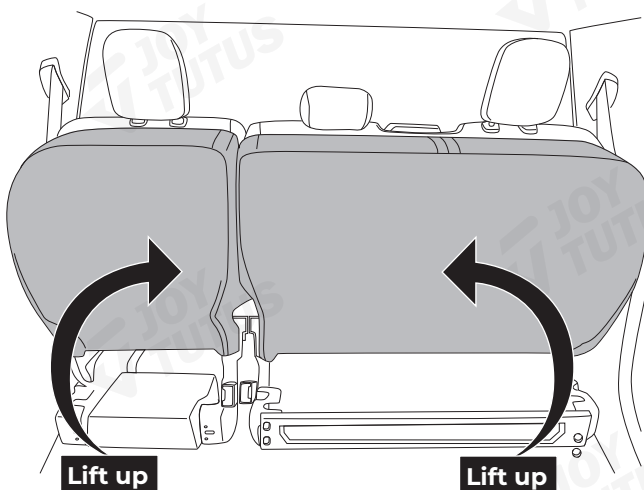


4. Loosen the original screws [A] and remove the plastic cover - 1. Remove the plastic cover - 2 directly.

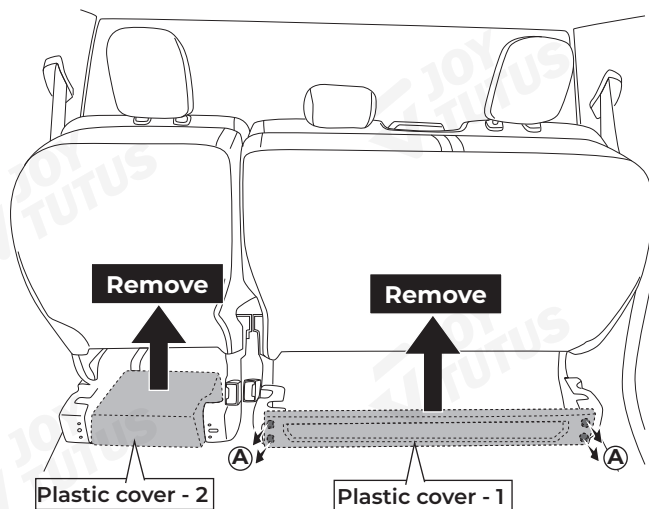

5. First align the assembled [1] [6] with the corresponding hole, then put the plastic cover - 1 on it and fix it with [11].

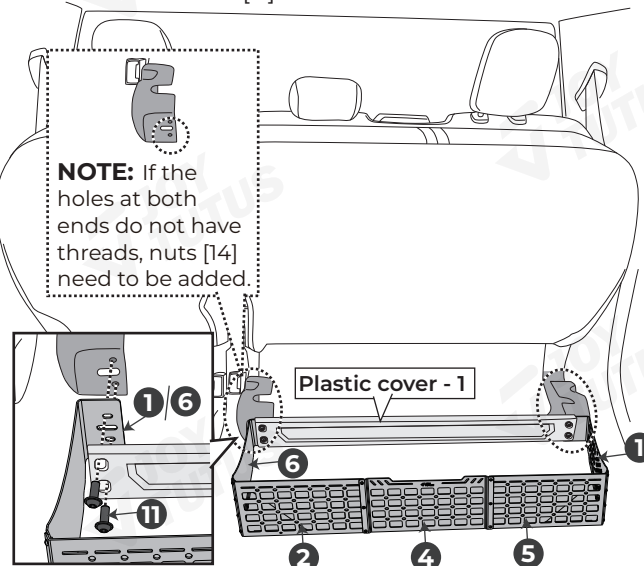

6. Align the assembled [7] [9] to the corresponding hole, and then connect and fix it with [12] and [13].

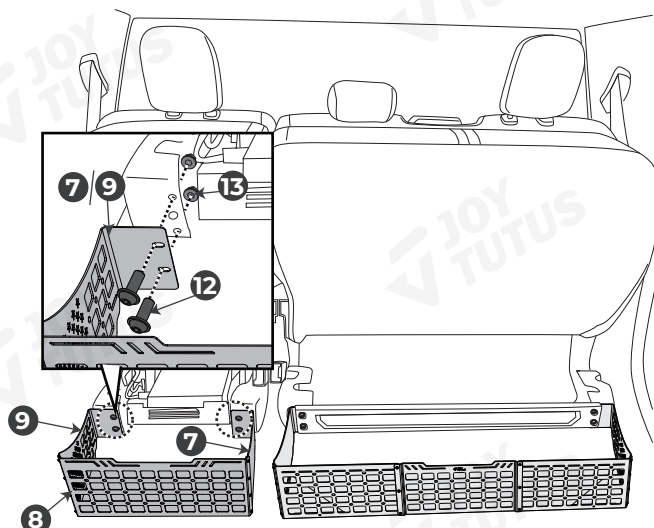

7. Put down the plastic cover - 2 and then the installation is completed.

